

BUNGEE RETURN KIT INSTRUCTIONS

Use these instructions to install bungee return kit on EZ-LOC® or ROLTEC® Side Locking Tarp Systems. Read and follow these instructions along with the standard instructions carefully before installing or using tarp system.

NOTICE TO INSTALLER: Even if familiar with hardware, read instructions prior to installation as improvements may be made without notice. Always handle components with care. If you have questions or problems, call customer service. When done, these instructions must be given to the consumer.

NOTICE TO CONSUMER: Before using this product, read safety and maintenance sections of these instructions. Save these instructions for future reference.



Questions? 800-233-4655
agricover.com

PREPARATION

COMPONENTS

- (2) Guides with hardware
- Bungee cord assembly

TOOLS NEEDED

- Tape measure
- Drill with 5/16" bit
- Impact wrench with standard wall 9/16" socket
- Protective eyewear

STAINLESS STEEL KIT ONLY

▲ CAUTION: To avoid galling of stainless steel hardware, use anti-galling spray, grease or lubricant on threads and avoid high speed when fastening. Do not use impact tools for stainless steel hardware.


3/8" x 1" Stainless steel bolts, nuts and washers: Use when fastening guides to box. When possible, use nuts and washers.

3/8" x 1" Non-stainless steel self-threading bolts: Use only if you are unable to use nuts. Drill 5/16" hole, turn 3/8" x 1" self-threading bolt in to cut threads and turn back out. Then use 3/8" x 1" stainless steel bolt to fasten guides to box.


1: INSTALL BUNGEE RETURN KIT

A. At rear of box, place guide on end of latch plate and adjust to extend 5/16" to 3/4" beyond face of end cap.

NOTE: Ensure bungee cord will clear bolt heads on face of end cap.

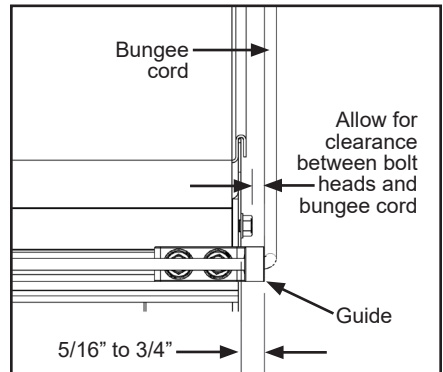

B. Use guide as template to drill (2) 5/16" holes. Fasten guide with 3/8" x 1" self-threading bolt in each hole.

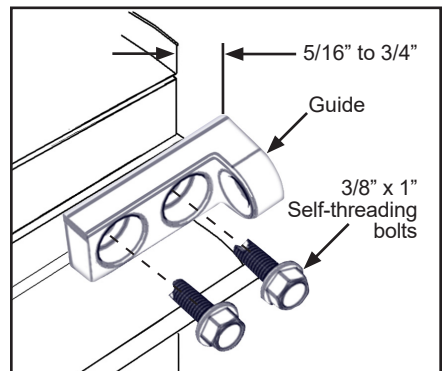

1: INSTALL BUNGEE RETURN KIT (Continued)

C. Unroll tarp to hang down on latch plate side. Remove handle, if needed remove spline.

D. Slide collar onto roll tube where collar can rotate freely. Reattach handle and secure with wire lock pin (if removed, reattach spline).

E. Roll tarp open and secure in holder. According to box width in diagram, select nearest existing bolt location in latch plate, remove and fasten first hole in second guide.

F. Using second hole in guide as template, drill a 5/16" hole and fasten with 3/8" x 1" self-threading bolt.

G. Lead bungee cord through first and second guides, pull snug and tie permanent knot at end of second guide.

H. Unroll tarp to hang down on latch plate side. Bungee cord should have some pre-tension load. If not, untie knot and adjust bungee cord tension as needed.

